

250T125-18


Product category	1.25 in Leg Nonstructural
Product description	Track, Depth (Web) 2.5", Width (Leg) 1.25", Thickness 18 mils - 20 ga EQ
Coating weight	G40 (Heavier coating on request)
Color coding	
Min Yield Strength	33 ksi (higher ksi on request)

Geometric Properties

Thickness	18 mils
Web Width	2.5 in
Leg Height	1.25 in

Used in framing applications:

- Composite Drywall Interior Partitions
- Non-load bearing Walls
- Concrete Wall Fur Out
- Drop Ceilings

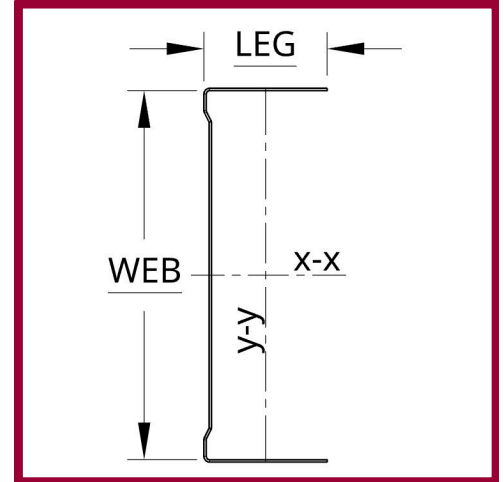

LEED - v4 & v4.1 Contributing Credits

FSFTM uses steel with a high mass of recycled content. Contact us for HPD and EPD.

Credit MR 2.1/2.2 – Construction Waste Management

Credit MR 4.1/4.2 - Recycled Content Credit Intent

Credit MR 5.1/5.2 – Regional Materials

ASTM and AISI Code Standards

Material Specifications	Min Yield	Min Tensile	Minimum Metallic Coating Designation
ASTM A653, SS Grade 33	33 ksi	45 ksi	G60
ASTM A1003, Grade 33 Type H (ST33H)	33 ksi	45 ksi	G601, A601, AZ502, GF303
ASTM A653, SS Grade 50 Class 1	50 ksi	65 ksi	G60
ASTM A1003, Grade 50 Type H (ST50H)	50 ksi	65 ksi	G601, A601, AZ502, GF303
ASTM A653 HSLA Grade 50	50 ksi	65 ksi	G60

Florida Steel Frame & Trusses Manufacturing comply with:

ICC ESR-3064P – SSMA – 2023

SSMA Technical Guide

IBC 2021 International Building Code

FBC 2023 Florida Building Code

IRC 2021 International Residential Code

Please contact our team for additional information on the following:

Service punchout, dimples, submittal information, MTRs and testing reports, limiting wall heights

Gross Properties

Area (in ²)	Weight (lb/ft)	Ixx (in ⁴)	Rx (in)	Iyy (in ⁴)	Ry (in)
0.094	0.32	0.103	1.051	0.015	0.4

Effective Properties

Ixx (in ⁴)	Sxx (in ³)	Ma-L (in-k)	Ma-D (in-k)	Vag (lb)
0.078	0.045	0.9		249

Torsional Properties

Jx1000 (in ⁴)	Cw (in ⁶)	Xo (in)	m (in)	Ro (in)	β	Lu (in)
0.011	0.018	-0.769	0.46	1.362	0.681	